HPCC Portable Site Office

Smart, Sustainable, and Ready to Move

- Ready to Assemble
- Fast Deployment
- High Salvage Value
- Hassle Free Installation
- Relocatable
- Built to Last

RINAC introduces the HPCC Portable Site Office, a ready-to-deploy workspace built using High Performance Composite Construction (HPCC) technology. Designed for speed, strength, and sustainability, this pre-fabricated modular unit is ideal for project sites, remote operations, or temporary office needs.

Built entirely with **RPUF** insulated sandwich panels for the walls, floor, and roof, the structure ensures superior thermal efficiency, energy savings, and greater durability. Compact yet functional, it comes fully equipped with workstations, sleeping and storage facilities, a washroom, and essential utilities—offering a complete, comfortable, and productive environment.

Dispatch from Bengaluru:

30–40 working days from order confirmation and payment.

Portable on a 20 ft trailer, the HPCC Site Office can be relocated effortlessly, making it an ideal choice for dynamic project teams. With a minimum life expectancy of 20 years (T&C apply), it's a durable, eco-friendly and value for money solution for modern businesses on the move.

Challenges with Conventional Site Offices

Traditional site offices often pose multiple challenges:

- **Time-consuming setup** with civil work, welding, and on-site fabrication
- **No insulation,** leading to uncomfortable indoor conditions and high energy costs
- **Corrosion and short lifespan,** especially in humid or coastal environments
- **Limited portability,** making relocation difficult and costly
- **Low hygiene and aesthetics,** which can impact worker morale and client perception

Who Can Use the HPCC Portable Site Office?

The HPCC Portable Site Office is ideal for:

- Construction projects
- Infrastructure companies
- Renewable energy projects
- Engineers & Site supervisors
- Highway/Toll Plaza/Weigh Bridges
- Oil & Gas projects
- Government departments
- Disaster relief teams
- Industrial plants
- Project consultants

HPCC-Portable Site Office-What it Contains

- Size: 4M X 3M X 2.5M
- Built entirely with RPUF Sandwich Panels
- Wall, Floor and Roof constructed with RPUF Sandwich Panels
- RPUF Insulated Doors with View Glass
- Portable in a 20 ft trailer
- Energy Efficient
- Green Building
- Durable: Minimum 20 Years of Life - T&C Apply

Configuration:

- Work- Station:
- 4 Chairs Capacity
- 2 File Shelves
- 2 Bunker Beds with Mattress
- Water Pump-0.5HP
- Rain-Gutters with Drops
- MS Painted Base Frame
- MS Painted Lifting Members-Removable
- 1 Wall Mounted Fan
- VPVC Windows- 3 Nos
- UPVC Louvers for Bunk Beds
- Cloth Racks
- Vinyl Flooring
- Wash Room with overhead tank and Fittings

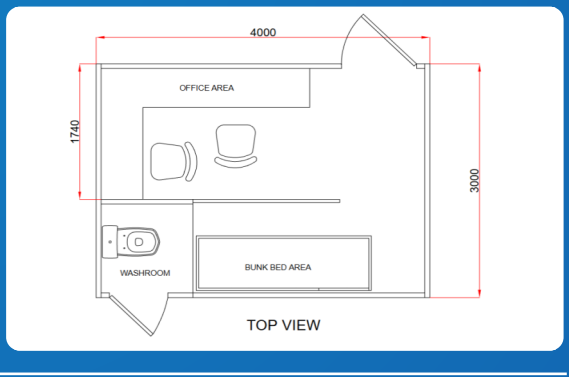

PORTABLE SITE OFFICE

With Lifting Members Rs. 3,30,000.00 (Ex-Rinac Works-Bangalore)

Without Lifting Members Rs. 3,15,000.00 (Ex-Rinac Works-Bangalore)

SECURITY CABIN: Rs. 85,000.00

Transportation: Purchaser's Scope
GST @ 18% Extra as applicable

For further details, please contact: Sudheer Pattathil +91-99452 34238/32
or mail at: spm@rinac.com | www.rinac.com